


**ANNEX 1 – WAVE 76/18 (Ref. RUU)**


**MACROLUX® ROOFLITE® WAVE 76/18**

Section

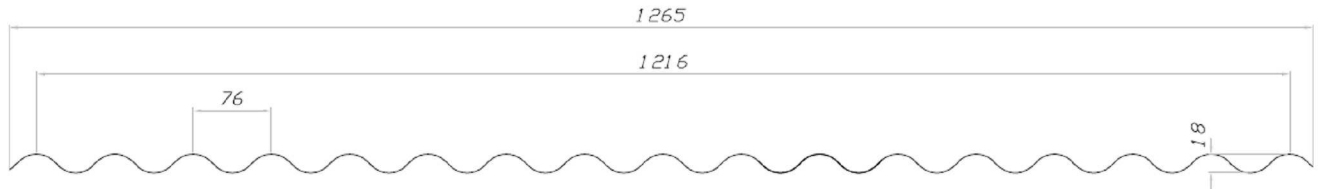

<b>THICKNESSES</b>	<b>0.8 mm</b>	<b>1.0 mm</b>	<b>1.1 mm</b>
<b>WEIGHT</b>	<b>1.10 kg/m<sup>2</sup></b>	<b>1.35 kg/m<sup>2</sup></b>	<b>1.50 kg/m<sup>2</sup></b>
<b>WIDTH</b>	<b>Nominal (Sheet max)</b>		<b>Useable</b>
	660 mm		608 mm
	836 mm		900 mm
	1.040 mm		988 mm
	1.116 mm		1.064 mm
	1.265 mm		1.216 mm
<b>LENGTH</b>	6.000/7.000 mm		
<b>AVAILABLE COLOURS</b>	Crystal Opal		
<b>THERMAL EXPANSION</b>	0.065 mm/m °C (6.5 x 10 <sup>-5</sup> 1/°C)		
<b>MINIMUM RADIUS OR CURVATURE</b>	4.000 mm		
<b>MINIMUM SLOPE</b>	5%		
<b>RECOMMENDED FIXING</b>	Self-drilling 6.3x60 mm with EPDM gasket (max every 300 mm) Self-tapping for wood 6.5x60mm with EPDM gasket (max every 300 mm) Seaming plug (max every 300 mm)		
<b>SPACER MADE OR FOAMED PE</b>	Available in 988 mm bars		

✓ **BREAKING STRENGTH VALUES (\*) FOR EVENLY DISTRIBUTED LOADS**

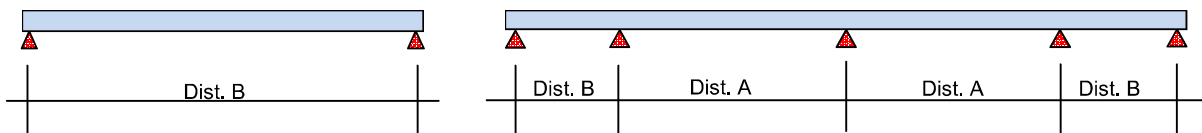

Thickness mm	Distance A				Distance B			
	600 N/m <sup>2</sup>	900 N/m <sup>2</sup>	1.200 N/m <sup>2</sup>	1.500 N/m <sup>2</sup>	600 N/m <sup>2</sup>	900 N/m <sup>2</sup>	1.200 N/m <sup>2</sup>	1.500 N/m <sup>2</sup>
0.8	1.000	900	850	800	800	700	650	600
1.0	1.050	950	900	850	850	750	700	650
1.1	1.100	1.000	900	850	850	800	750	700

(\*) Breaking strength values (safety coefficient 1.5)

Purchase of MACROLUX® ROOFLITE® sheets is subject to reserves, please check general sales conditions from our offices. Customised lengths manufactured upon minimum amounts of order. Colours provided per request upon minimum amounts of orders. Illustrative drawings, check tolerance (weight, dimensions, width, pitch) from our offices.

For further laying conditions see the MACROLUX® ROOFLITE® technical manual

All other company or product names, herein mentioned are registered trademarks belonging to the owners in question.