


## TERMINAL ROSCADO MANUAL

Acero Inoxidable Pulido- AISI 316

Nº ART DCHA	Nº ART IZDA	CABLE	G	L1	L2	L3	KW	KW1	B.L. KG.	kg/100
704800305	704810305	3	M5	79	58	42	10	12	750	4,2
704800306	704810306	3	M6	85	63	47	10	12	750	4,5
704800406	704810406	4	M6	92	63	47	12	14	1500	5,6
704800408	704810408	4	M8	102	72	57	12	14	1500	6,6
704800508	704810508	5	M8	111	78	57	13	16	2180	9,0
704800510	704810510	5	M10	117	84	63	13	16	2180	10,0
704800610	704810610	6	M10	128	90	63	16	19	3700	15,0
704800612	704810612	6	M12	145	107	80	16	19	3700	17,0
704800712	704810712	7	M12	153	110	80	18	21	4700	22,0
704800714	704810714	7	M14	162	119	89	18	21	4700	25,0
704800812	704810812	8	M12	162	113	80	19	24	5600	28,0
704800814	704810814	8	M14	171	122	89	19	24	5600	31,0
704800816	704810816	8	M16	182	133	100	19	24	5600	40,0
704801016	704811016	10	M16	190	139	100	24	27	8300	48,0
704801220	704811220	12	M20	227	159	120	27	32	12000	79,0
704801422	704811422	14	M22	264	191	140	30	36	14000	124,0
704801624	704811624	16	M24	308	227	170	32	41	23000	175,0

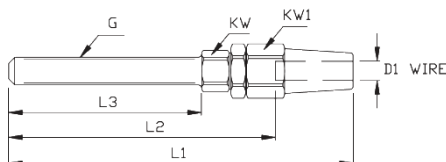

Nota: Todas las cargas de rotura están determinadas por las mordazas y la rosca