


CODOS ISOMÉTRICOS

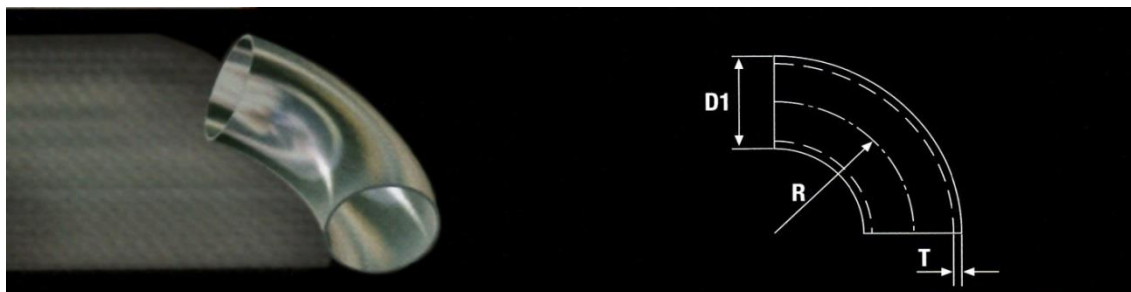

DIÁMETRO NOMINAL		DIÁM.EXTERIOR EN MM.	RADIO	ESPELOR DE PARED PESO TEÓRICO KG/UD
DN	PULGADAS	D1	R	T
15	1/2"	21.3	28	1.6/2 0.03/0.04
20	3/4"	26.9	29	1.6/2 0.05/0.06
25	1"	33.7	38	1.6/2 0.08/0.09
32	1 1/4"	42.4	48	1.6/2 0.14/0.20
40	1 1/2"	48.3	57	1.6/2 0.19/0.21
50	2"	60.3	76	1.6/2 0.29/0.40
65	2 1/2"	76.1	95	1.6/2 0.56/0.60
80	3"	88.9	114	2/3 0.78/1.16
100	4"	114.3	152	2/3 1.35/2.01
125	5"	139.7	190	2/3 2.07/3.1
150	6"	168.3	229	2/3 3.3/4.9
200	8"	219.1	305	2/3 5.2/7.8
250	10"	273	381	2/3 8.25/12.4
300	12"	323.9	457	2/3 11.7/17.75
350	14"	355.6	533.5	3/4 22/29.4

DIÁMETRO NOMINAL		DIÁM.EXTERIOR EN MM.	RADIO	ESPELOR DE PARED PESO TEÓRICO KG/UD
DN	PULGADAS	D1	R	T
400	16"	21.3	609.5	3/4 29/38
450	18"	457.2	686	3/4 37/49
500	20"	508	762	3/4 45/60

TOLERANCIAS

RADIO = 1.5 veces diámetro nominal en pulgadas convertido a mm.

ESPELOR = -12.5% del espesor nominal.