


CODOS SCHEDULE ASME / ANSI B16.9

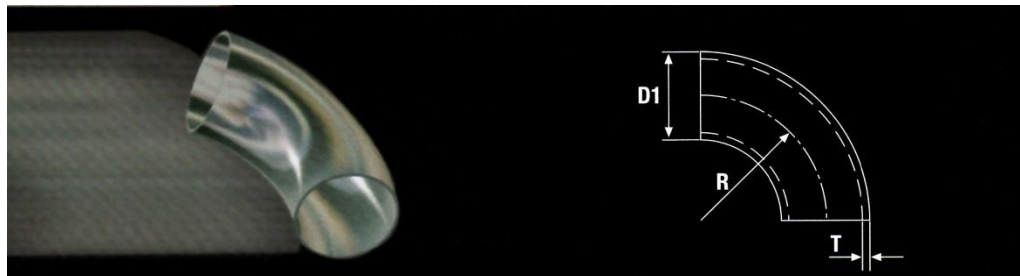

DIÁM.NOMINAL EN PULGADAS	DIÁM.EXTERIOR EN MM. D1	RADIO largo = R	RADIO corto = R	ESPESOR DE PARED / PESO TEÓRICO CODO R LARGO KG/UD			
				5 S	10S	40S / STD	80S / XS
				ESPESOR = T	ESPESOR = T	ESPESOR = T	ESPESOR = T
1/2	21,30	38,1		1,65 0,05	2,11 0,06	2,77 0,08	3,73 0,10
3/4	26,70	28,5		1,65 0,06	2,11 0,08	2,87 0,10	3,91 0,10
1	33,40	38,1	25,4	1,65 0,08	2,77 0,12	3,38 0,15	4,55 0,20
1 1/4	42,20	47,6	31,8	1,65 0,12	2,77 0,20	3,56 0,26	4,85 0,35
1 1/2	48,30	57,2	38,1	1,65 0,17	2,77 0,28	3,68 0,37	5,08 0,50
2	60,30	76,20	50,80	1,65 0,29	2,77 0,48	3,91 0,65	5,54 0,93
2 1/2	73,00	95,30	63,50	2,11 0,58	3,05 0,80	5,16 1,37	7,01 1,79
3	88,90	114,30	76,20	2,11 0,81	3,05 1,14	5,49 2,04	7,62 2,87
4	114,30	152,40	101,60	2,11 1,39	3,05 1,97	6,02 3,84	8,56 5,62
5	141,30	190,50	127,00	2,77 2,83	3,40 3,42	6,55 6,48	9,53 9,69
6	168,30	228,60	152,40	2,77 4,03	3,40 4,87	7,11 9,94	10,97 16,00
8	219,10	304,80	203,20	2,77 7,06	3,76 10,00	8,18 20,10	12,70 32,20
10	273,00	381,00	254,00	3,40 13,20	4,19 15,50	9,27 35,40	12,70 49,90
12	323,80	457,20	304,80	3,96 22,3	4,57 25,90	9,53 56,20	12,70 72,50
14	355,60	533,40	355,60	3,96 29,2	4,78 36,20	9,53 70,20	12,70 94,00
16	406,40	609,60	406,40	3,96 40,6	4,78 47,60	9,53 91,50	12,70 124,00
18	457,00	685,80	457,20	4,2 49,8	4,78 57,30	9,53 116,00	12,70 159,00
20	508,00	762,00	508,00	4,78 72	5,54 83,50	9,53 143,80	12,70 195,00